


Technical data sheet

**341-024D-03-S2F**  
**Spring return actuator**

Description

Spring return actuator for adjusting dampers in HVAC installations

- Running time motor 40 s / 90°
- Running time spring 20 s / 90°
- Torque motor 3 Nm
- Torque spring 3 Nm
- Nominal voltage 24 VAC/DC
- Control 2-point
- Damper size up to approx. 0,6 m²
- Shaft coupling clamp  
Ø 8-13 mm / Ø 8-16,5 mm

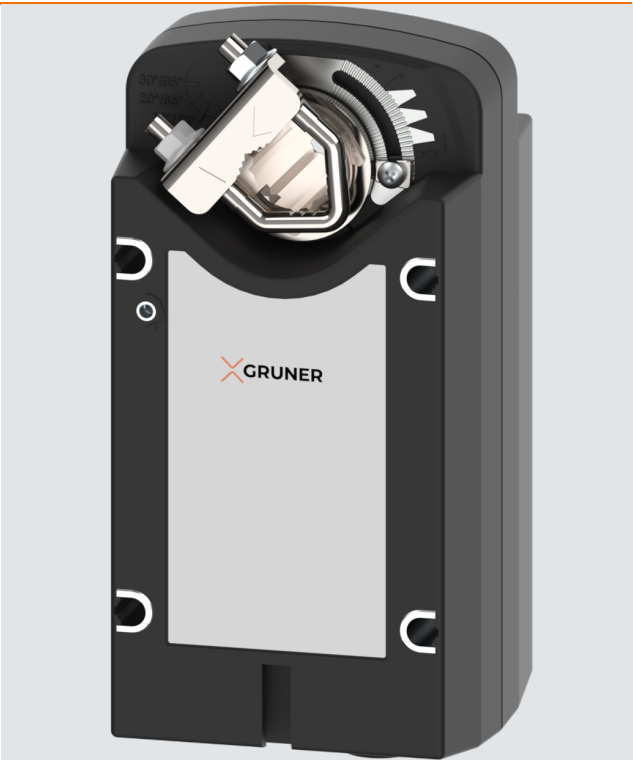

Technical data

|                 |  |  |
|-----------------|--|--|
| Electrical data | Nominal voltage                          | 24 VAC/DC, 50/60 Hz                        |
|                 | Nominal voltage range                    | 19...29 VAC/DC                             |
|                 | Power consumption motor (motion)         | 5,0 W                                      |
|                 | Power consumption standby (end position) | 1,5 W                                      |
|                 | Wire sizing                              | 7,0 VA                                     |
|                 | Control                                  | 2-point                                    |
|                 | Feedback signal                          | -  |
|                 | Auxiliary switch                         | 2 x SPDT (Ag)                              |
|                 | Contact load                             | 5 (2,5) A, 250 VAC                         |
|                 | Switching point                          | 10° / 85°                                  |
|                 | Connection motor                         | cable 1000 mm, 2 x 0,75 mm² (halogen free) |
|                 | Connection auxiliary switch              | cable 1000 mm, 6 x 0,75 mm² (halogen free) |
|                 | Connection GUAC                          | -  |
|                 |  |  |
| Functional data | Torque motor                             | 3 Nm                                       |
|                 | Torque spring                            | 3 Nm                                       |

## Technical data

|                            |  |   |
|----------------------------|--|---|
| <b>Functional data</b>     | Damper size                            | up to approx. 0,6 m <sup>2</sup>                                  |
|                            | Synchronized speed                     | ±5%   |
|                            | Direction of rotation                  | selected by mounting  |
|                            | Manual override                        | manual operation  |
|                            | Angle of rotation                      | 0°...max. 95° can be limited with adjustable mechanical end stops |
|                            | Running time motor                     | 40 s / 90°  |
|                            | Running time spring                    | 20 s / 90°  |
|                            | Sound power level motor                | < 45 dB(A)  |
|                            | Sound power level spring               | < 65 dB(A)  |
|                            | Shaft coupling                         | clamp $\varnothing$ 8-13 mm / $\varnothing$ 8-16,5 mm             |
|                            | Position indication                    | mechanical with pointer   |
|                            | Service life                           | > 60 000 cycles (0°...95°...0°)                                   |
|                            |  |   |
| <b>Safety</b>              | Protection class                       | III (safety extra-low voltage)                                    |
|                            | Protection class auxiliary switch      | II (double insulation)  |
|                            | Degree of protection                   | IP 54 (cable downwards)   |
|                            | EMC                                    | CE (2014/30/EU)   |
|                            | LVD                                    | CE (2014/35/EU)   |
|                            | RoHS                                   | CE (2011/65/EU - 2015/863/EU - 2017/2102/EU)                      |
|                            |  |   |
|                            | Mode of operation                      | Typ 1 (EN 60730-1)  |
|                            | Rated impulse voltage supply / control | 0,8 kV (EN 60730-1)   |
|                            | Rated impulse voltage auxiliary switch | 4 kV (EN 60730-1)   |
|                            | Control pollution degree               | 3 (EN 60730-1)  |
|                            | Ambient temperature normal operation   | -30°C...+50°C   |
|                            | Storage temperature                    | -30°C...+80°C   |
| <b>Dimensions / Weight</b> | Ambient humidity                       | 5...95% r.H., non condensing (EN 60730-1)                         |
|                            | Maintenance                            | maintenance free  |
|                            |  |   |
|                            | Dimensions                             | 145 x 75 x 70 mm  |
|                            | Weight                                 | 1100 g  |

## Functionality / Properties

### Operating mode

Connect power supply to wire 1+2, actuator drives to position 1 while the pre-tensioned spring is wound up the same time. If the power supply is interrupted, actuator drives back to position 0 by spring power. The actuator is still maintaining the minimum torque at the damper spindle.

The actuator is overload-proof, requires no limit switches and automatically stops when the end stop is reached.

### Direct mounting

Simple direct mounting on the damper shaft with a clamp, protection against rotating with enclosed anti-rotation lock or rather at intended attachment points.


### Manual override

The actuator can only be operated manually while the power supply is off. The supplied lever is used to open and lock the damper position. The lock stays until the power supply is switched on again.

### Signaling

The two integrated auxiliary switches are activated at the fixed switching positions (10° and 85°). The damper position can be checked by the mechanical pointer.

## Connector / Security Note

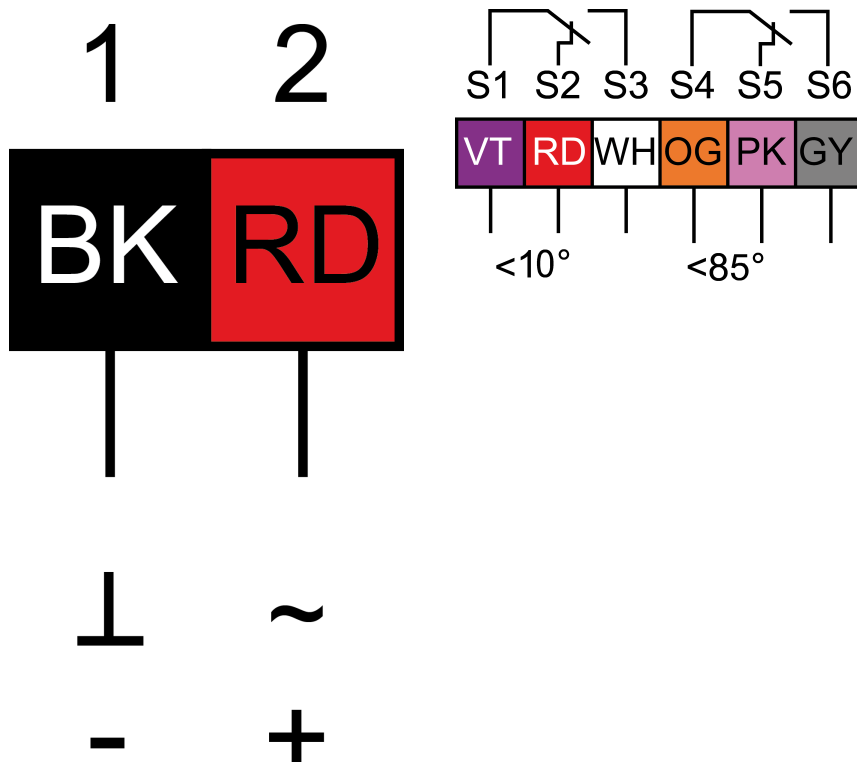

### Safety remarks

- Connect via safety isolation transformer!
- The device is not allowed to be used outside the specified field of application, especially in airplanes.
- It may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- The device is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.
- When calculating the required torque, the specifications supplied by the damper manufacturer's (cross-section, design, installation site), and the air flow conditions must be observed.

## Technical Drawing

